


## 1330 liters tank i syrefast 316

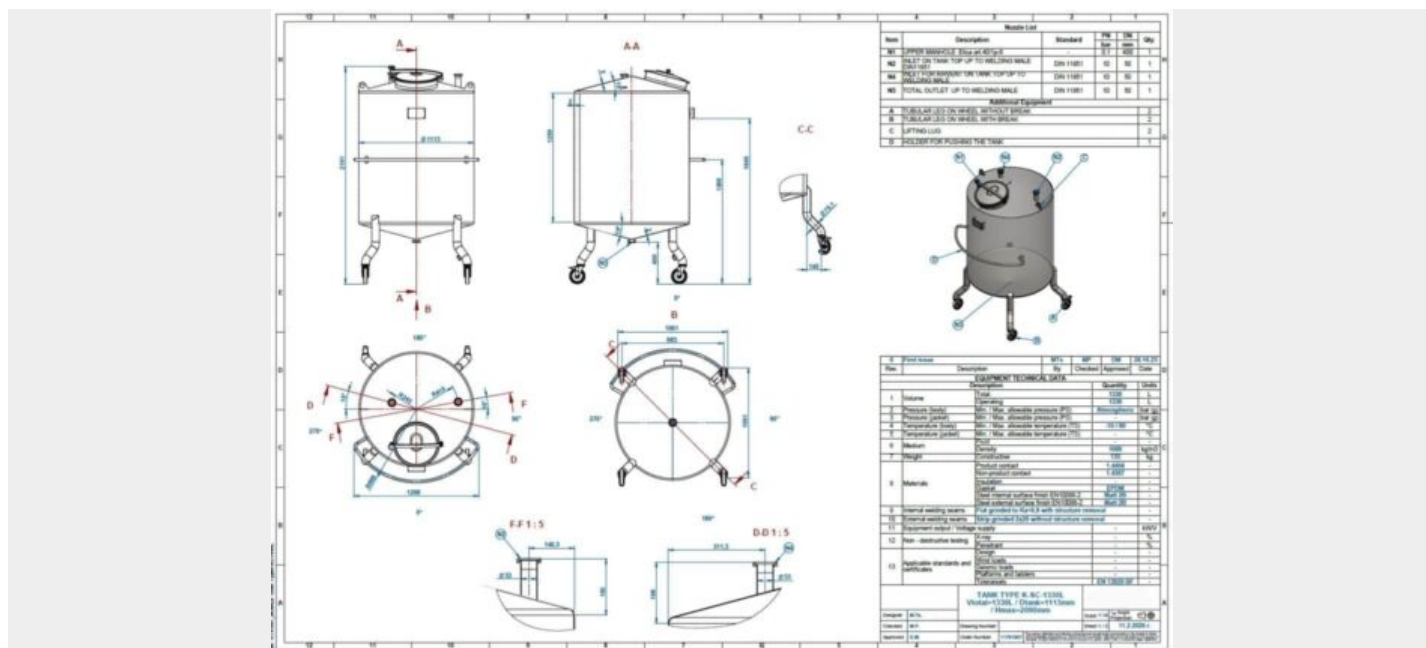

143 000 SEK /st exkl moms

item available on order

**Article type:** brand new storage tank - type K-SC

**Volumetric volume (L):** 1.330 L

**Max. density P (kg/m³):** 1.400

**Ra inner weld:** 0,80

**Finish stainless steel:** 2B

**Pressure in tank:** ATM - atmosferic

**Max. temperature (°C):** 80 °C

**Material wet parts:** SS AISI 316L (V4A)

**Model:** vertical



**Configuration:** single-skin

**Heat exchanger:** no

**Insulation:** no

**Mobile tank:** yes

**Top type:** conical 15 °

**Shape of tank:** cylindrical

**Bottom type:** conical 15 °

**Bottom outlet:** yes

**Total discharge:** yes

**Fixation points:** 4 casters

**Manway(s):** RVS 316

**Gasket manway(s):** EPDM

**Fixation point(s):** RVS 304

**Suitable for food industry:** yes

**Documents included:** yes, optional

**Technical drawing included:** yes

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Number of manways:** 1

**Position of manway:** at the top

**Height manhole 1 (mm):** 400 mm

**Hinged lid:** yes

**Tank outlet:** inside Ø

**Outlet of tank:** DIN11851

**Total outlet valve:** no, optional

**Agitator:** no, optional

**Top:** 2 mm

**Cylinder:** 2 mm

**Bottom:** 2 mm

**Distance from outlet to ground:** 400 mm

**Outer diameter tank:** 1.113 mm

**Cylinder height:** 1.250 mm

**Total height of tank:** 2.101 mm



**Empty weight tank:** 180

**SKU:** 566396

## Mer information

### Beskrivelse av produkt

Næringsmiddelgodkjent: Ja

Materiale: Syrefast 316

Modell: Vertikal

Nyprodusert/Brukt: Nyprodusert

Arbeidstrykk i tank:

Finish rustfritt stål: 2b

Konfiguration: enkelthudet

Maks. arbeidstemperatur: 80 °C

Maksimal tetthet for produktet: 1400

Mobil tank: Ja

Omrører: Nei

Ra innvendig sveis: 0,80

Tankens form: sylindrisk

Total uttapping:

Type bunn: konisk 15 °.

Oppvarming/kjøling: Nei

Væskebelastet overflate: SS AISI 316L (V4A)

Volum i liter: 1330



## Utstyr

Flens for omrører: Nei  
Merkeskilt: Ja  
Næringsmiddelgodkjent: Ja  
Tankutløp: innvendig Ø  
Teknisk tegning finnes: Ja

## Materialoversikt

Materiale: Syrefast 316  
Festepunkt(er): RVS 304

## Tankdimensjoner

Sylinderhøyde: 1250 mm  
Mål utløp til bakken: 400 mm  
Total høyde: 2,101 mm  
Ytre diameter: 1,113 mm

## Tanktykkelse

Bunn: 2 millimeter  
Sylinder: 2 millimeter  
Topp: 2 millimeter

## Mer

Isolert: Nei  
Vekt: 180