160 liters tank i syrefast 316

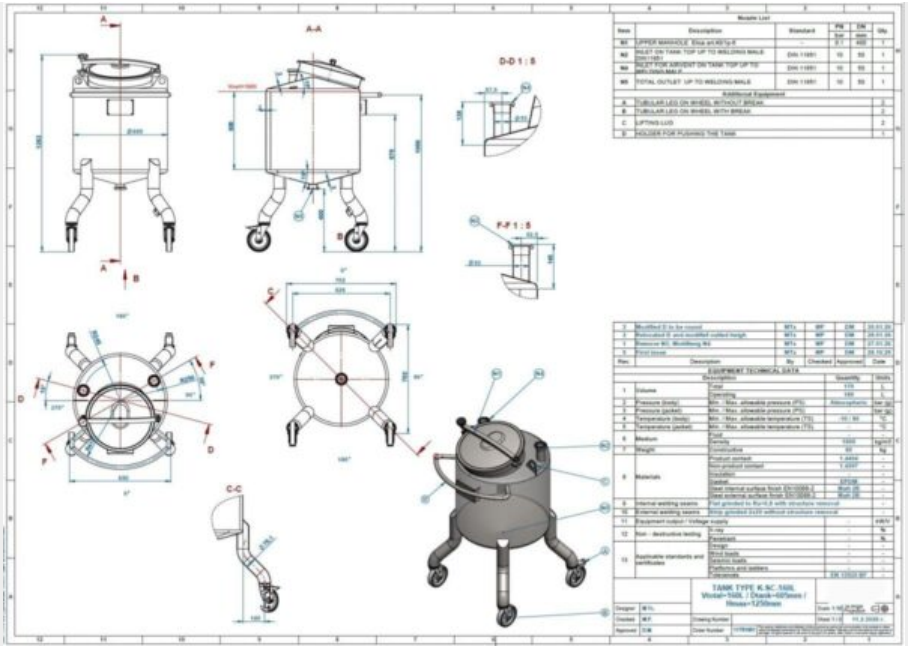

126 000 SEK /st exkl moms

item available on order

Article type: brand new storage tank - type K-SC
Volumetric volume (L): 160 L
Max. density P (kg/m³): 1.400
Ra inner weld: 0,80
Finish stainless steel: 2B

Pressure in tank: ATM - atmosferic
Max. temperature (°C): 100 °C
Min. temperature (°C): -10 °C
Material wet parts: SS AISI 316L (V4A)

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Model: vertical

Configuration: single-skin
Heat exchanger: no
Insulation: no
Mobile tank: yes
Top type: conical 15 °

Shape of tank: cylindrical
Bottom type: conical 15 °
Bottom outlet: yes
Total discharge: yes
Fixation points: 4 casters

Manway(s): RVS 316
Gasket manway(s): EPDM
Fixation point(s): RVS 304
Suitable for food industry: yes
Documents included: yes, optional

Technical drawing included: yes
Registration plate on the tank: yes
Flange for agitator: no
Number of manways: 1
Position of manway: at the top

Height manhole 1 (mm): 400 mm
Tank outlet: inside Ø 50 mm
Outlet type: DIN11851
Total outlet valve: no, optional
Agitator: no, optional

Top: 2 mm
Cylinder: 2 mm
Bottom: 2 mm
Distance from outlet to ground: 400 mm
Outer diameter tank: 605 mm

Cylinder height: 500 mm
Total height of tank: 1.263 mm

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Empty weight tank: 50

SKU: 566342

Mer information

Beskrivelse av produkt

Næringsmiddelgodkjent: Ja
Materiale: Syrefast 316
Modell: Vertikal
Nyprodusert/Brukt: Nyprodusert
Arbeidstrykk i tank:
Finish rustfritt stål: 2b
Konfiguration: enkelthudet
Maks. arbeidstemperatur: 100 °C
Maksimal tetthet for produktet: 1400
Min. arbeidstemperatur: -10 °C
Mobil tank: Ja
Omrører: Nei
Ra innvendig sveis: 0,80
Tankens form: sylindrisk
Total uttapping:
Type bunn: konisk 15 °.
Oppvarming/kjøling: Nei
Væskebelastet overflate: SS AISI 316L (V4A)
Volum i liter: 160

Utstyr

Flens for omrører: Nei
Merkeskilt: Ja
Næringsmiddelgodkjent: Ja
Tankutløp: innvendig Ø 50 mm
Teknisk tegning finnes: Ja
Utløpstype: DIN11851

Materialoversikt

Materiale: Syrefast 316
Festepunkt(er): RVS 304

Tankdimensjoner

Sylinderhøyde: 500 mm
Mål utløp til bakken: 400 mm
Total høyde: 1,263 mm
Ytre diameter: 605 mm

Tanktykkelse

Bunn: 2 millimeter
Sylinder: 2 millimeter
Topp: 2 millimeter

Mer

Isolert: Nei
Vekt: 60