


3158 liters tank i Syrafast 316

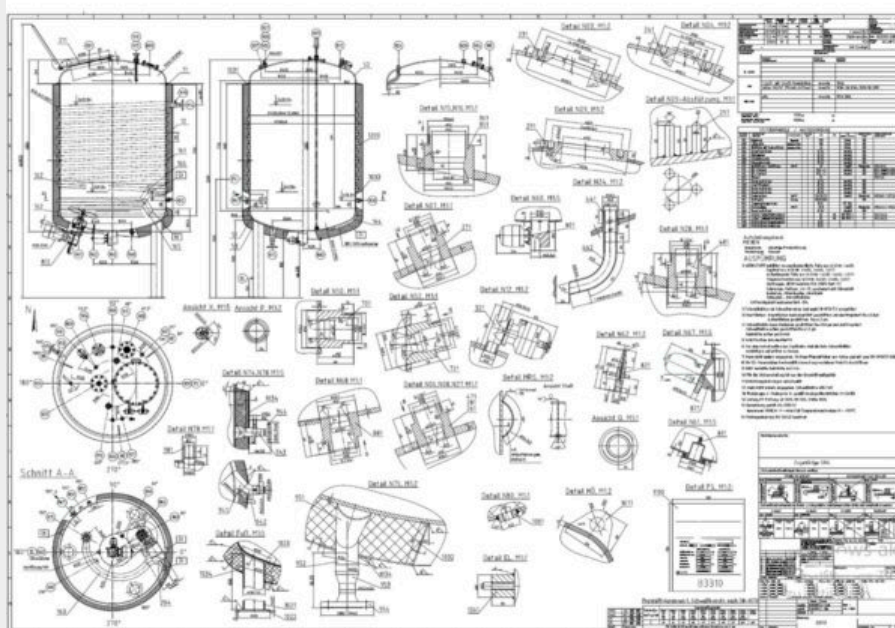

319 000 SEK /st exkl moms

Additional information: tank is unused, was only filled with demineralised water for pressure testing

Volumetric volume (L): 3.158 L

Pressure in tank: ATM - atmosferic

Max. pressure (Bar): 6 Bar



Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: single jacketed with heat-exchanger

Heat exchanger: yes

Insulation: no

Mobile tank: no

Total discharge: no

Volume: 90 L

Max Overpressure: 10 Bar

Max onderdruk: 1 Bar

Max. working temperature: 150 °C

Type HE on the cylinder: half pipe welded onto the outside of the innertank

Heat exchanger: RVS 316

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: headside

Outlet of tank: available

Top: 10,50 mm

Cylinder: 5,60 mm

Bottom: 7,50 mm

Internal diameter tank: 1.400 mm

Outer diameter tank: 1.580 mm

Cylinder height: 1.680 mm

SKU: 433583



Mer information

Beskrivelse av produkt

Materiale: Syrefast 316

Modell: Vertikal

Nyprodusert/Brukt: Brukt

Arbeidstrykk i tank: ATM – atmosfærisk

Konfiguration: enkeltmantlet med varmeveksler

Maks. arbeidstemperatur: 150 °C

Mobil tank: Nei, det er det ikke.

Øvrig informasjon: tanken er ubrukt, ble bare fylt med demineralisert vann for trykktesting

Omrører: Nei

Overtrykk: 6 barer

Total uttapping: Nei, det er det ikke.

Undertrykk (vakuum): 1 bar

Trykktank: Ja

Oppvarming/kjøling: Ja

Væskebelastet overflate: SS AISI 316 (V4A)

Volum i liter: 3158

Utstyr

Dokument finnes: Nei, det er det ikke.

Flens for omrører: Nei

Merkeskilt: Ja

Teknisk tegning finnes: Nei, det er det ikke.

Materialoversikt

Materiale: Syrefast 316



Tankdimensjoner

Sylinderhøyde: 1 680 mm

Innvendig diameter: 1 400 mm

Ytre diameter: 1580 mm

Tanktykkelse

Bunn: 7,50 mm

Sylinder: 5,60 mm

Topp: 10,50 mm

Mer

Varmeveksler: RVS 316

Isolert: Nei