3535 liters tank i syrefast 316

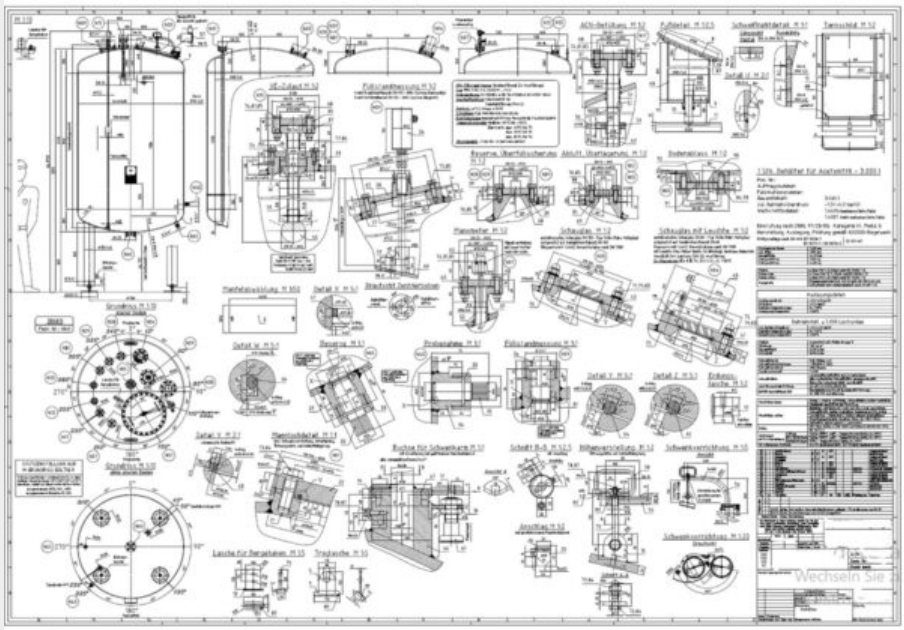

180 000 SEK /st exkl moms

Additional information: tank is unused, was only filled with demineralised water for pressure testing
Volumetric volume (L): 3.535 L
Pressure in tank: pressure and vacuum
Max. pressure (Bar): 6 Bar

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C
Material wet parts: SS AISI 316 (V4A)
Model: vertical
Configuration: single jacketed with heat-exchanger
Heat exchanger: yes

Insulation: no
Mobile tank: no
Total discharge: yes
Max Overpressure: 6 Bar
Max onderdruk: 1 Bar

Documents included: no
Technical drawing included: no
Registration plate on the tank: yes
Flange for agitator: yes
Position of manway: headside

Outlet of tank: DN32 DIN 11851
Internal diameter tank: 1.400 mm
Cylinder height: 1.650 mm
Total height of tank: 3.553 mm

SKU: 433523

Mer information

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Beskrivelse av produkt

Materiale: Syrefast 316
Modell: Vertikal
Nyprodusert/Brukt: Brukt
Arbeidstrykk i tank: trykk og vakuum
Konfiguration: enkeltmantlet med varmeveksler
Maks. arbeidstemperatur: 150 °C
Mobil tank: Nei, det er det ikke.
Øvrig informasjon: tanken er ubrukt, ble bare fylt med demineralisert vann for trykktesting
Omrører: Nei
Overtrykk: 6 barer
Total uttapping: Ja
Undertrykk (vakuum): 1 bar
Trykktank: Ja
Oppvarming/kjøling: Ja
Væskebelastet overflate: SS AISI 316 (V4A)
Volum i liter: 3535

Utstyr

Dokument finnes: Nei, det er det ikke.
Flens for omrører: Ja
Merkeskilt: Ja
Teknisk tegning finnes: Nei, det er det ikke.

Materialoversikt

Materiale: Syrefast 316

Tankdimensjoner

Sylinderhøyde: 1 650 mm
Innvendig diameter: 1 400 mm
Total høyde: 3,553 mm

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Mer

Isolert: Nei

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor