4000 liters tank i syrefast 316

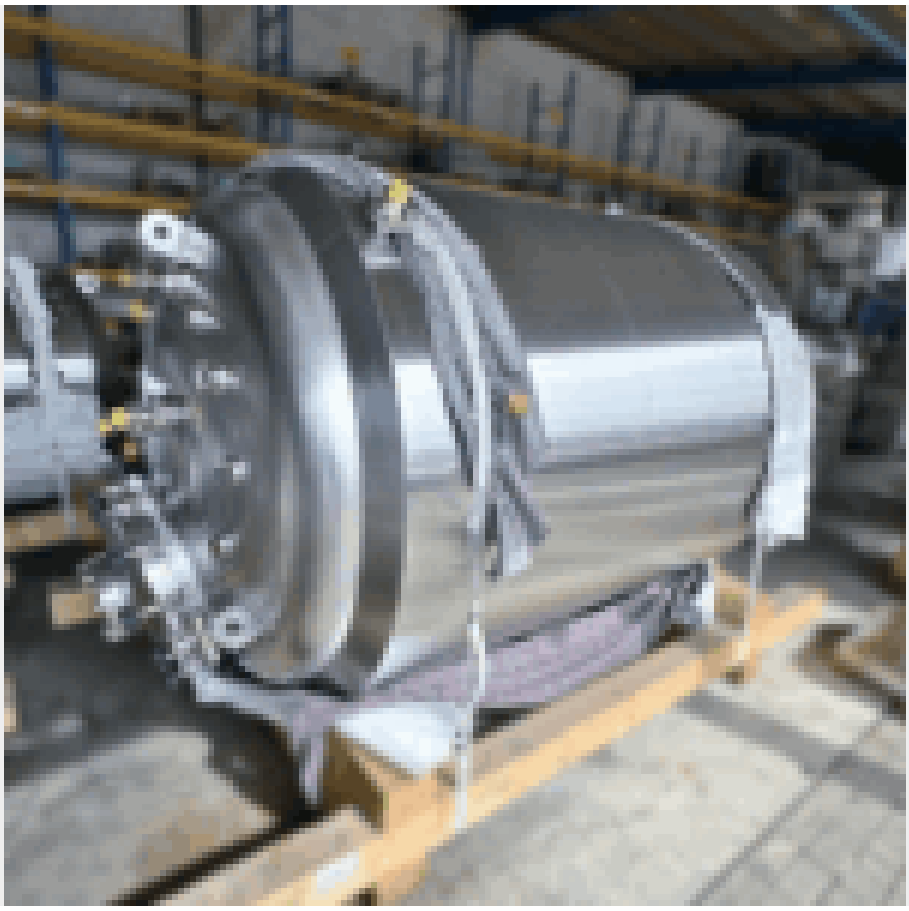

484 000 SEK /st exkl moms

Additional information: Fully comprehensive documentation in accordance with pharmaceutical industry standards included in the scope of delivery; device was manufactured for a global pharmaceutical company but never put into operation there; hand hole with sight glass diameter: 150 mm; incl. Südmo single seat valve SVP (outlet)
Volumetric volume (L): 4.000 L

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor

Pressure in tank: pressure and vacuum
Max. pressure (Bar): 6 Bar
Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C
Material wet parts: SS AISI 316 (V4A)
Model: vertical
Configuration: insulated
Heat exchanger: no

Insulation: yes
Mobile tank: no
Total discharge: yes
Volume: 184 L
Max Overpressure: 6 Bar

Max onderdruk: 1 Bar
Max. working temperature: 150 °C
Type HE on the cylinder: half pipe welded onto the outside of the innertank
Documents included: no
Technical drawing included: no

Registration plate on the tank: yes
Flange for agitator: no
Position of manway: headside
Outlet of tank: available
Top: 15 mm

Cylinder: 6 mm
Bottom: 10 mm
Internal diameter tank: 1.600 mm
Outer diameter tank: 1.830 mm
Cylinder height: 1.930 mm

Total height of tank: 3.695 mm
Empty weight tank: 2.050

SKU: 441356

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Mer information

Beskrivelse av produkt

Materiale: Syrefast 316
Modell: Vertikal
Nyprodusert/Brukt: Brukt
Arbeidstrykk i tank: trykk og vakuum
Konfiguration: isolert med varmeveksler
Maks. arbeidstemperatur: 150 °C
Mobil tank: Nei, det er det ikke.
Øvrig informasjon:
Øvrig informasjon2: diameter: 150 mm; inkl. Südmo enkeltseteventil SVP (utløp); vi kan ikke gi noen garantier for varme-/kjølekappen
Omrører: Nei
Overtrykk: 6 barer
Total uttapping: Ja
Undertrykk (vakuum): 1 bar
Trykktank: Ja
Oppvarming/kjøling: Ja
Væskebelastet overflate: SS AISI 316 (V4A)
Volum i liter: 4000

Utstyr

Dokument finnes: Nei, det er det ikke.
Flens for omrører: Nei
Merkeskilt: Ja
Teknisk tegning finnes: Nei, det er det ikke.

Materialoversikt

Materiale: Syrefast 316

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Tankdimensjoner

Sylinderhøyde: 1 930 mm
Innvendig diameter: 1 600 mm
Total høyde: 3695 mm
Ytre diameter: 1830 mm

Tanktykkelse

Bunn: 10 mm
Sylinder: 6 millimeter
Topp: 15 mm

Mer

Isolert: Ja
Vekt: 2.050

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Läs våra köpvillkor